
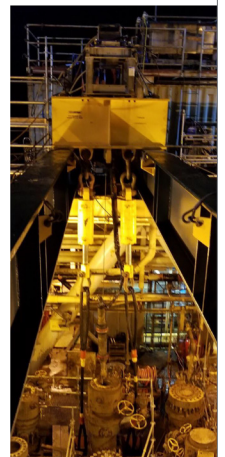


# Hydraulic Proving Frame (250 T)

The Oceaneering 250-T Hydraulic Proving Frame can be remotely operated by an Oceaneering operator. The system comprises two 125-T cylinders. The drive pipe is fitted with a rated pad eye, shackles, and proving slings, which are held under tension during the cut. Once the cut is completed, a pressure differential is seen at the cylinder. Then the cylinders are stroked approximately 18 in (46 cm) to verify the successful severance of the conductor.

**Note:** Deck loading calculations should be performed during the planning phase of the project.

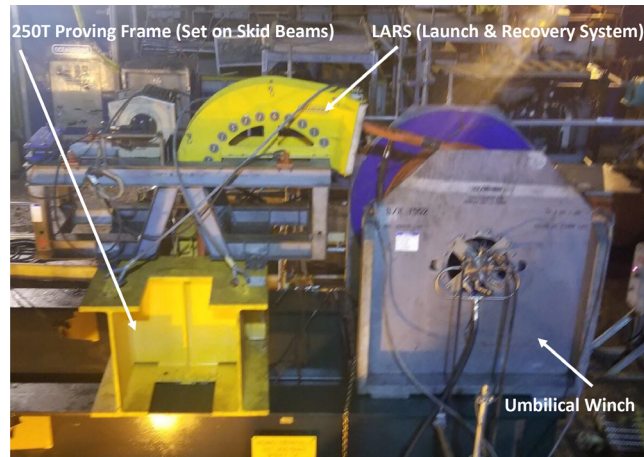

## FEATURES

**Remotely operated**

**250-T capacity**

**18-in (46-cm) stroke**

## Specifications

Footprint	92 x 53 x 53 in / 2.3 x 1.3 x 1.4 m
Weight in air	11,000 lb / 4990 kg
Operational limits	250 (short) tons / 2,224 N